

## Technical data





# CDD 10-80

## Electric pedestrian stacker (1,000 kg)


The CDD 10-80 is the entry-level model of the electric pedestrian stackers. Intended for easy applications in the internal material flow and thanks to its compact design, it is especially suited for operations in narrow spaces. Fitted with a single mast, the truck is the ideal material lifting device for ergonomic operations. The maintenance-free battery in combination with an on-board charger as part of the standard version ensure particularly easy handling.

# Technical data in line with VDI 2198

Issue: 12/2018

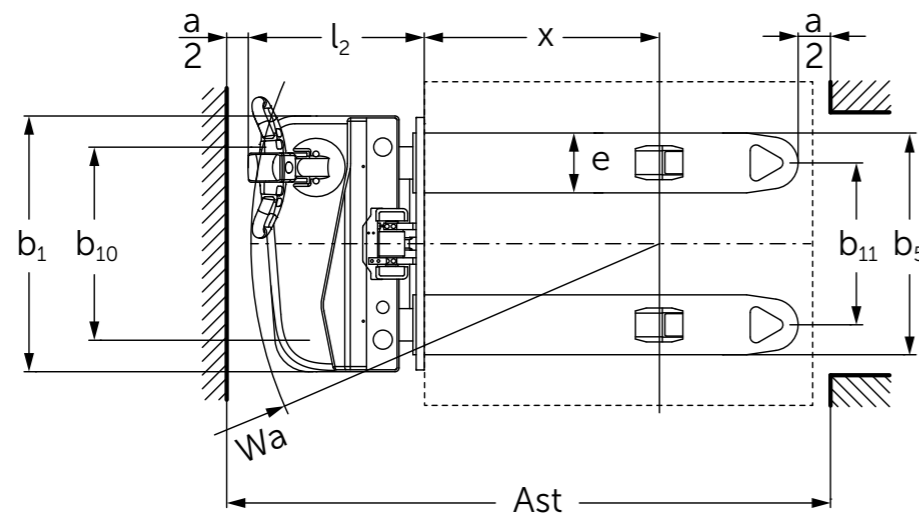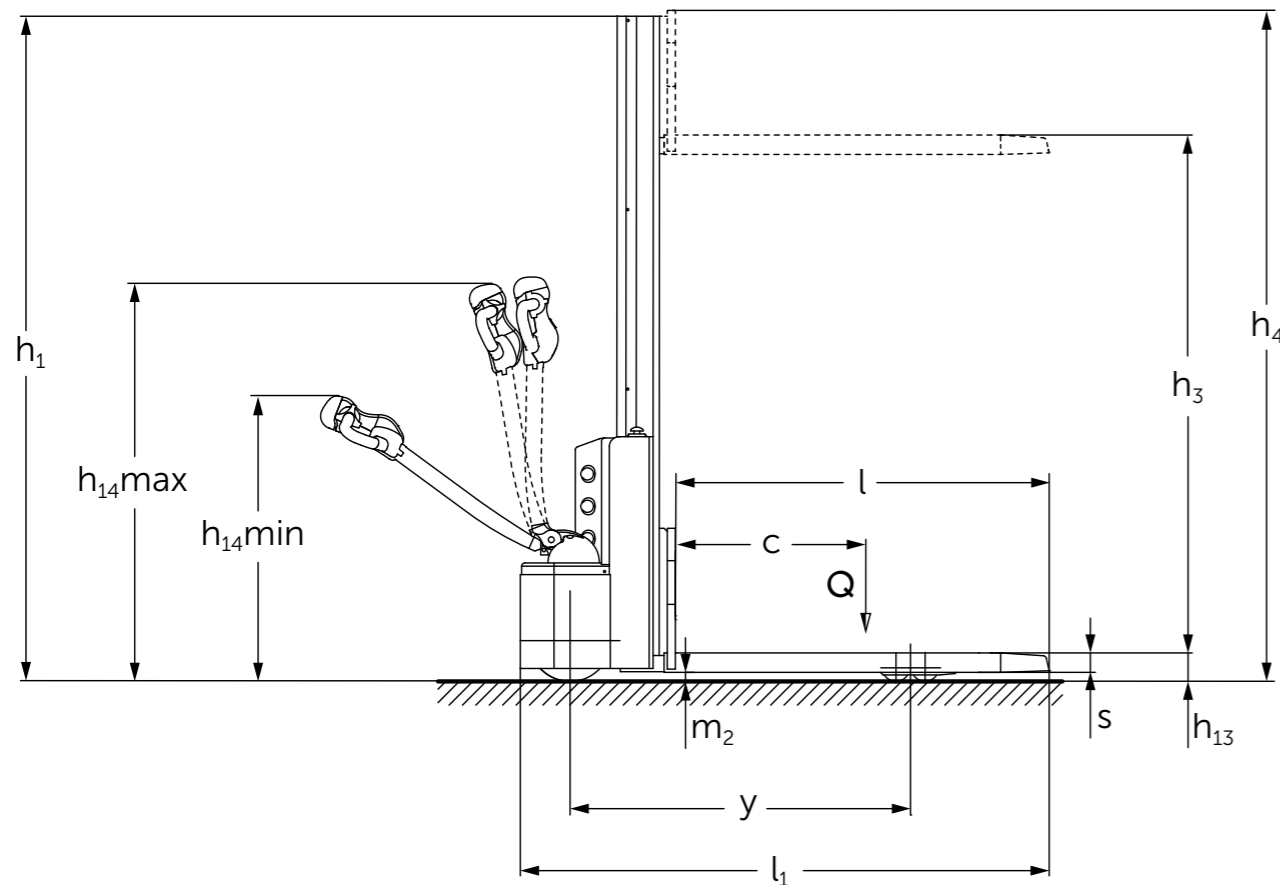

Identification	1.2	Model		CDD10-080JH
	1.3	Drive		Electrics
	1.4	Manual, pedestrian, stand-on, seated, order picker operation		Pedestrian
	1.5	Load capacity/rated load	Q t	1.0
	1.6	Load centre distance	c mm	600
Weights	1.8	Load distance	x mm	727
	1.9	Wheelbase	y mm	1,070
	2.1.1	Net weight incl. battery (see row 6.5)	kg	460/466
Wheels/ chassis	2.2	Axle load with load front/rear	kg	482/978
	2.3	Axle load without load front/rear	kg	313/147
	3.1	Tyres		PU
	3.2	Tyre size, front	mm	Ø 250x70
	3.3	Tyre size, rear	mm	Ø 84x70
	3.4	Additional wheels (dimensions)	mm	Ø 115x55
	3.5	Wheels, number front/rear (x = driven wheels)		1x+1/4
Basic dimensions	3.6	Tread width, front	b10 mm	507
	3.7	Tread width, rear	b11 mm	365
	4.2	Mast height (lowered)	h1 mm	2,055/2,405
	4.4	Lift	h3 mm	1,510/1,860
	4.5	Extended mast height	h4 mm	2,055/2,405
	4.9	Height of tiller in drive position min. / max.	h14 mm	850/1,252
	4.15	Lowered height	h13 mm	90
	4.19	Overall length	l1 mm	1,634
	4.20	Length incl. back of forks	l2 mm	484
	4.21	Total width	b1/b2 mm	790
	4.22	Fork dimensions	s/e/l mm	55/185/1,150
	4.25	Width over forks	b5 mm	550
	Performance data	4.32	Floor clearance centre wheelbase	m2 mm
4.33		Aisle width for pallets 1000 x 1200 sideways	Ast mm	1,958
4.34		Aisle width for pallets 800 x 1200 lengthways	Ast mm	2,008
4.35		Turning radius	Wa mm	1,335
5.1		Travel speed, w./w.o. load	km/h	3/3,5
5.2		Lift speed, w./w.o. load	m/s	0.12/0.18
5.3		Lowering speed, w./w.o. load	m/s	0.11/0.11
Electrics	5.8	Max. gradeability, laden/unladen	%	5/7
	5.10	Service brake		Electromagnetic
	6.1	Drive motor, output S2 60 min.	kW	0.63
	6.2	Lift motor, output at S3 15%	kW	2.0
	6.4	Battery voltage/nominal capacity K5	V/Ah	24/70
Misc.	6.5	Battery weight	kg	2x 24
	8.1	Type of drive control		DC Speed Control



Jungheinrich trucks  
conform to the European  
Safety Requirements.

**Jungheinrich Lift Truck Singapore Pte Ltd**  
7 Joo Koon Way,  
Singapore 628945

Tel.: +65 6558 7600

Fax.: +65 6558 7611

[info@ameise.com.sg](mailto:info@ameise.com.sg)

[www.ameise.com.sg](http://www.ameise.com.sg)